



1 Publication number: 0 528 576 A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 92307087.4

(a) Int. Ct.5: B42D 5/02. B42D 15/08

(22) Date of filing: 03.08.92

③ Priority: 15.08.91 GB 9117590 15.08.91 GB 9117589

(3) Date of publication of application: 24.02.93 Bulletin 93/08


Designated Contracting States :
 DE FR GB NL

(7) Applicant: MOORE BUSINESS FORMS, INC. 300 Lang Boulevard Grand Island New York 14072-1697 (US) (2) Inventor: Perriman, Victor 50 Ravenscourt Grove Hornchurch, Essex RM12 6HH (GB)

(74) Representative: Spence, Anne et al Fry, Heath & Spence Mill House Wandle Road Beddington Croydon Surrey CR0 4SD (GB)

(64) Mailers and business form assemblies for producing mailers.

(57) The invention relates to a sealed mailer or a business form assembly for providing a series of such mailers. In one form, the mailer has a folded edge and three other edges sealed by adhesive. A line of perforation extends along a first edge opposite the folded edge. Adhesive along the other two opposite edges is of a peel-apart arrangement such that after the first edge has been detached, the other two edges can be peeled apart to open out the mailer without significantly damaging the mailer. In another form, two rectangular sheets are sealed along all four edges with a line of perforation along a marginal edge portion of a first of the edges. Two edges adjacent the first edge and extending normal thereto are secured to one another by a peel-apart adhesive arrangement such that after the first edge portion has been torn off along the line of perforation, the two sheets from which the mailer is formed can be peeled apart from one another without significantly damaging the mailer.



BACKGROUND AND SUMMARY OF THE

This invention relates to mailers and business form assemblies for producing such mailers.

In one aspect, the invention is particularly appliciable to business from assembles comprising a substantially continuous web containing a plurally of maler forming units separable from one another by first transverse lines of perforation extending completely across the web, ach maler forming unit comprising a front sheet and a back sheet of similar size, the maler forming unit carrying non-arthe, but activatable, adhesive such that a sealed malier unit can be formed by folding the unit to bring the forth and back sheets in register and activating the achiesive to from a seal along the three non-folded edges.

Conventional mailers have the three seeled edges detachable along perforation lines which extend inside the lines of adhesive so that after the marginal edge portions have been removed by tearing along the lines of perforation the mailer can be opened out along the foliation the fold lines.

Accordingly, in one aspect, the invention provides e seeked maler and a business form assembly for providing a sories of such mallers, in which the mailer has a folded edge and three-ther edges sealed by adheabye. The mailer includes a line of perforation along a finit edge opposite the folded edge and inside the substantially continuous line of adheaves sealing that edge. The adheave along the other two opposite edges lis of a peel-apart arrangement, e.g., a series of speed small close of adheaves with no adheave between the dost. Thus, after the first edge has been destached, the other two edges can be peel ed apart to open out the maller without significantly damaging the maler.

More particularly, the invention in this aspect thereof provides a business form assembly for forming a plurality of mailers, comprising a continuous web formed with a plurality of mailer forming units separated from one another by first transverse lines of perforetion extending across the web. Each unit is formed with a central fold line such that the unit can be folded, after separation from the web, over along the central fold line to provide a sealed mailer having a front sheet and a back sheet in register with one another. At least parts of the edge portions parallel to the fold line carry a first non-active adhesive such that when such edges are brought together, a first substantially continuous line of adhesive is provided for sealing these edge portions together. A detachment line of perforations extends along the edge portions parallel to the fold line and inside the first adhesive line to define a tear-off margin. Portions of the edges normal to the fold line have a non-active secand peel-apart adhesive arrangement therealong to seal the edge portions together. By removing the

tear-off margin, the edge portions normal to the fold line can be peeled apart to open the maller without significant damage thereto.

This aspect of the invention extends to mailers formed from such business form assemblies which have been foided and the adhesive activated to seal the units. Preferably, the adhesive is heat activatable or pressure activatable and the same adhesive is used for forming the substantially continuous adhesive line and for forming the peel-apart arrangements. The peel-apart arrangements comprise spaced-apart spots or discrete areas of adhesive separated by arees free of adhesive. The spacing is such that the area free of adhesive along the line of peel-apart adhesive is at least twice the area covered by adhesive, preferably three to six times as great and with advantage about four to five times as great. The central fold line of the mailer may extend transversely or iongitudinally of the web, depending upon the desired dimensions.

The adheeve in this embodiment is arranged substantially symmatrically of the units so that seach half of the unit certies substantially half the adheeve. Where the adheeve is a heat seal adheeve, preferably the spots of the poel-spart adheeve of one half are interspaced between the spots of peel-spart adheeve or the control of the spots of the desired the spots of the

In another aspect, the invention utilizes separate message and cover sheets in which the message sheets are capable of being fed through a non-impact printer to have information printed on such message sheets, while the cover sheets bear all the adhesive for sealing the two sheets together after they have been collated so as to form a sealed mailer. In this aspect, the separate message and cover sheets are preferably provided in the form of continuous webs, the message web comprising a plurality of message sheets connected to one another by transverse lines of perforations and the cover web comprising a plurality of cover sheets connected to one another by transverse lines of perforations. The adhesive for securing the sheets together may be heat seal or pressure seal adhesive.

Such business form assemblies are described in European Patent Specification 0143622. However, the mailers of that specification are intended to be opened by tearing off four marginal edge portions along lines of perforations formed in both sheets.

Accordingly, in this second aspect of the present invention, there is provided a mailer and a business form assembly for forming such a mailer, in which the mailer is formed from two sheets sealed along all four edges. A line of perforations are provided along a first of the edges extending inside a substantially contin-

uous line of adhesive along that marginal edge portion. At least the two edges adjacent the first edge and extending normal thereto are secured to one enother by a peel-apart adhesive arrangement such as previously described in the first embodiment hereof. After the first edge portion has been torn off along the line of perforation, the two sheets from which the maller is formed can be peeled apart from one an-

other. More particularly, this aspect of the invention provides a business form assembly for forming a mailer comprising a message sheet suitable for passage through a non-impact printer to receive information thereon. A cover sheet of a corresponding size to the message sheet is provided, each of the sheets having longitudinal and transverse edges. One of the sheets, preferably the cover sheet, carries adhesive along its four marginal edge portions such that when it is collated with a message sheet and the adhesive activated the sheets will adhere to one another along the edge to form a sealed mailer. The adhesive along a first of the edges of the cover sheet is formed in a substantially continuous line, the cover sheet being formed with a line of perforations parallel to the first edge and inwardly of the continuous line of adhesive. The message sheet is also formed with a line of perforations adapted to substantially overlie and lie in register with the line of perforations on the cover sheet when the sheets are collated. The adhesive along at least the two opposite edge portions of the cover sheet extending normal to the first edge is of a

Preferably, the business form assembly comprises a furnilly of message a heats and a plurality of cover sheels, included respectively in a continuous message web and a continuous cover who, each comprising a plurality of such sheets separated from the adjacent sheets by transverse lines of perforations. In one form of this second embodiment, each message sheet and seach cover sheet same the full width of such webs. In another form, there are provided two cover sheets and two message sheets arranged side by side on the web, each separated from one another by a silt line extending longitudinally of the webs. A line of a dheelve extends longitudinally adjacent and on each side of the central sidline of the cover sheet.

peel-apart arrangement as previously described.

In a preferred embodiment according to the present invention, there is provided a sealed maller comprising a first sheet and a second sheet overlying the first sheet, at least one of the sheets being suitable for passage through a printer for receiving information thereon, the sheets having longitudinal and transverse edges in respective registration one with the other. Means are provided for joining the registering longitudinal and transverse edges of the first and second sheets one to the other, thereby defining longitudinal and transverse edges of the maller. The mailer has a lies of perforations slong the first and so of the standard of the sheet and the sheet a

second sheets defining a margin adjacent one of the edges of the maller and extending inside the joining means along the one mailer edge, the joining means along the one mailer edge including a substantially continuous line of adheetve along the margin. The first and second sheets along at least two of the joined edges thereof adjacent the one mailer edge and extending normal thereto are secured together by a peel-apart chaelve a rrangement whereby, after the margin of the mailer has been torn off along the line of perforations, the first and second sheets can be peeded apart from one another without significantive damaging the mailer.

In a further preferred embodiment according to the present invention, there is provided a business form assembly for forming a plurality of mailers comprising a continuous web including a plurality of maller forming units separable from one another by first transverse lines of perforations extending across the web, each unit, after separation from the web, having a central fold line such that the unit can be folded over along the central fold line to form a mailer having a front sheet and a back sheet in register with one another, edges of the front and back sheets in register with one another defining edge portions of the mailer perpendicular and parallel to the fold line. At least parts of an edge portion of the mailer parallel to the fold line carry a first non-active adhesive, such that, when the edges of the parallel edge, portions are brought together, a first substantially continuous line of adhesive is provided for sealing the edge portions together. A detachment line of perforations extends along the edge portions parallel to the fold line and inside the first adhesive line, parts of the edges of the front and back sheets forming edge portions of the mailer normal to the fold line having non-active, noncontinuous second lines of adhesive therealong, such that when the unit is folded to bring the edge together second peel-apart lines of non-continuous adhesive are provided for sealing these edges together along their lengths in a manner enabling the edges thereof to be peeled apart.

in a further preferred embodiment according to the present invention, there is provided a business form assembly for forming a mailer comprising a message sheet suitable for passage through a non-impact printer to receive information thereon, a cover sheet of a corresponding size to the message sheet, each of the sheets having longitudinal and transverse edges, one of the cover sheets and the message carrving adhesive along each of marginal edge portions adjacent the edges such that when the sheets are collated and the adhesive activated, the sheets will adhere to one another along their marginal edge portions to form a sealed mailer. The adhesive along a first of the edge portions of the one sheet is formed in a substantially continuous line, the one sheet being formed in a substantially continuous line of perforations parallel to the first edge portion and inwardly of the continuous line of athesive, the other sheet being for med with a line of perforations adapted to substantially register with the line of perforations of the one sheet when the sheets are collated and the adhesive along at least the two opposite edge portions of the one sheet extending normal to the first edge portion being of a peel-apart type.

Accordingly, it is a primary object of the present invention to provide novel and improved mailers and business form assemblies for forming the mailers.

These and further objects and advantages of the present invention will become more apparent upon reference to the following specification, appended claims and drawings.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

Figure 1 Illustrates a first embodiment of mailer forming unit forming part of a business form assambly according to the present invention;

Figure 2 illustrates the web of Figure 1 on a reduced scale;

Figure 3 illustrates a mailer formed from the unit of Figure 1, on a reduced scale and at a later stage of the processing;

Figure 4 is similar to Figure 1 showing a further form of the embodiment of Figure 1;
Figure 5 illustrates a later processing stage of the

Figure 5 Illustrates a later processing stage of the mailer units of Figure 4; Figure 6 illustrates a message sheet forming part

of a message web of a second embodiment of the prasent invention; Figure 7 illustrates a cover sheet forming part of

a cover web for the message sheet web of Figure 6;
Floure 8 illustrates a mailer formed from the

sheets of Figures 6 and 7; Figure 9 illustrates an alternative form of message sheet forming part of a message web ac-

sage sheet forming part of a message web according to this second embodiment; Figure 10 Illustrates a cover sheet forming part of a cover web for the message sheet of Figure 9;

Figure 11 illustrates a mailer formed from the message and cover sheets of Figures 9 and 10.

DETAILED DESCRIPTION OF THE DRAWING FIGURES

Reference will now be made in detail to a present preferred embodiment of the invention, an example of which is illustrated in the accompanying drawings.

Referring now to Figures 1 to 3, a mailer forming unit 12 according to this invention has longitudinally extending edges 13, 14 and upper and lower transverse edges 15, 16. The unit 12 forms part of a continuous web 17 having a jourally of such units, with each unit separable from adjacent units by transverse alines of perforation 20. As particularly seen in Figure 2, the lines of perforation 20. As particularly seen in Figure 2, the lines of perforation 20, when broken, form the upper and lower of the transverse edges of the maler. The isteral edges of the males a leader of the way and the sproaket guide holes 19 in a known manner. Each maller forming with has an inside hea 21, an outside face 22, a front sheet 23 and a back sheet 24, the front and back sheet 24, the front and back sheet 24 is the front and back sheet 24 is on the sheet of some 3 as shown. The front sheet is formed, in a known manner, with a window 27 so that when the unit is folded, an address 28 will be viewable through the window.

Part of the edge porrions 30, 31 of the edges parlet to the fold line 28 and which will form the oposite edge of the maler to the fold line, carry non-active, but heat activatable, adheave 32. When the edges are brought together, adheave 32 will form a substantially continuous line of adheave securing those edges one to the other. The edge portions 33, 34 extending normal to the fold line carry spaced apart spots of non-active, but heat ectivateble, sight provide a line of peel-apart adheave along both such edges.

In a preferred form, each spot 36 of adhesive 35 is square or diamond-shaped, with each side having a length of 0.2 cms and the spots spaced spart by about 0.7 to 0.95 cms. It should be noted that approximately half of the adhesive is on the upper sheet and half on the lower sheet to provide a substantially even weighted and balanced unit. The edhesive may be activatable by other means, such as pressure, in which case similar complementary lines or spots of adhesive would be placed on each of the front and back sheets so that they would register in contact with one another when the unit is folded. Lines of perforations 31, 38 are formed adjacent the dege portions 31, 32 parallel to the contral fold line 26 and inside the adhesive line 32.

The web may have pre-printed information there on and information is common to all forms. The business who wishes to send out the mailers will then pass the web through a printer to provide individualized information on each form, such as the addresses 28. The longitudinal edges carrying the perforation 19 are then detached and the individual units burst from one another along the perforation lines 20. The units are then folded as seen in Figure 3 and passed through a sealer unit in which the adhesive is activated to form the sealed edges.

To open the unit, for example, when received through the mail, the edge opposite the fold line is torn off along the registering perforation lines 37, 38. The front and back sheets are then peeled apart from each other along edge portions 33, 34 to open out the

4

mailer

The form of business form assembly of Figures 4 and 5 is substantially similar and like parts have been given like reference numerals and will not be redescribed. In this form, the transverse fold line of Figures 1 to 3 has been replaced by a longitudinally extending fold line 26a and the tear-off edge extends longitudinally instead of transversely of the web. The edge portions 33, 34 carrying the heat activatable adhesive in a peel-apart arrangement, as previously described, have relatively widely spaced peel-apart spots of adhesive, with the spots on the top sheet and the bottom sheet, respectively, spaced at different distances from the fold line 26a so that they will be interspaced when the edges are brought together. A substantially continuous fold line could also be formed by interspaced patches of adhesive, some on the top and some on the bottom sheet, and the peelapart spots could also be interspaced in the maller of Figures 1 to 3.

As illustrated in Figure 5, the web is folded about the central longitudinal fold line 28a. The sprocket holes may then be detached and the web passed through a sealer unlit to activate the glue and seal the edges. The units may then be detached from one another in a burster to provide the finished mailers.

Referring now to the embodiment hereof illustrated in Figures 6-11, there is illustrated a message sheet 112 having longitudinal edges 113, 114 and transverse edges 116, 117. The message sheet forms and of a continuous message web 118 provided with transverse lines of perforations 118a to divide the web into the message sheets, these lines coinciding with the transverse edges 116, 117. The message who 118 is of a form suitable for passing through a non-impact printer to receive personalized information and carries no heat ensitive adhesive.

A cover sheet 120 of the same size as the message sheet 112 has longitudinal edges 121, 122 and transverse edges 123, 124. The cover sheet forms part of a cover web 125 provided with transverse lines of perforations 125a to divide the web into a series of such cover sheets with the transverse edges 123, 124 coinciding with the lines 125a extending across the full width of the cover web. Both the cover web and the message web have a series of sprocket quide holes 126 along each longitudinal edge so that the webs can be accurately fed through a series of machines such as printers, adhesive supplying machines, collating machines, sealing machines and bursters. The cover sheet is provided in known manner with a window 127 so that a personalized address printed on the message sheet can be viewed through the window when the sheets are collated.

As shown in Figures 7 and 10, the cover sheet bears lines of adhesive. These adhesive lines are provided on the rear of the cover sheet but for clarity are shown on the front of the sheet.

The cover sheet has a substantially continuous line 130 of non-active but activatable adhesive along its longitudinal edge 122 inside the sprocket holes 126. In practice, this adhesive may be formed as a pattern of overlapping discrete areas to produce an effectively continuous line. The cover sheet has a line of perforations 131 adjacent its longitudinal edge 122 inside the line of adhesive 130. The message sheet has a line of perforations 132 arranged to overlie and be in register with the perforations 131 in the cover sheet when the sheets are laid on top of one another. Lines of adhesive 133, 134 and 135 of a peel-apart arrangement, similarly as previously described in the first embodiment of Figures 1-5, are located along the other three marginal edge portions of the cover eheet. Thus, the adhesive is of the same kind as that of the line 130 but comprises a series of spots or discrete areas spaced from one another so that the sheets can be pulled apart after being sealed together with very limited fiber tear of the sheets. In the preferred form, each spot 136 is substantially square or diamond-shaped with each side having a length of about 0.2 cms and the spots are spaced apart so that along the line of adhesive the adhesive free areas are three to nine times the adhesive areas, preferably four to six times.

The adheeive is preferably activated by heat but may be activated by other means such as pressure. In the latter case, the message sheet must beer complementary lines and spots of adheeive similar to those on the cover sheet but of a flore such such light insensitive to the type of heat generated by a leaser printer, so that the adheeive on the message sheet will register with and contact the adheeive on the cover sheet when they are brought together.

After the sheets 112 have been printed with personalized information, the sheets 112 and the sheets 120 are collated, that is, they are brought into overlying coinciding relationship one on too of the other and fed through a sealing machine which activates the adhesive to secure the sheets together around all four edges and form a series of connected mailers. The sproaket holes are normally then detached and the Individual mailers separated from one another in a burster. Figure 8 shows one such individual mailer

Figures 9 to 11 show another form of similar message sheets and cover sheets forming part of mesage webs and cover webs of this second embodiment and wherein similar parts have been given like reference numerals. In the arrangement of Figures 9 and 10, two message sheets and two cover sheets are located side by side with one another across the with for respective webs, in no-called two to view arrangement. The side-by-side sheets are separated by a respective contral longitudinal still lines 140, 141 and the cover sheet has two additional longitudinally extending lines to pde-spart althospic 142, 143 and

45

25

jacent the perforation line 141. The left hand side of the message web is formed with a substantially continuous line of adhesive 145 similar to line 130 and the message web and cover web are formed with lines of perforation 146, 147 inside the line of adhesive 145 and corresponding to the lines 131 and 132. The message sheets been no heat sensitive adhesive.

Which marginal edge carries the line of substantially continuous adhesive and which edge portions carry the lines of peel-apart adhesive is a matter of

While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not be limited to the disclosed embodiment, but on the contarry, is intended to cover-viations modifications and equivalent arrangements included within the scope of the appended claims.

A business form assembly for forming a plurality

Claims

of mallers comprising one or two continuous webs (17), the or each web being formed with a plurality of maller forming units (12, 112) separated from one another by transverse lines of perforation (20) extending across the webs, in the case of a single web the web being formed with a central fold line (26) so that the web can be folded over elong the central fold line to provide a series of registering front sheets (23) and back sheets (24), and in the case of two webs the units of one web forming message sheets and the units of the other web forming cover sheets, the webs being adapted to be brought together to form a series of registering front and back sheets, the business form assembly being provided with non-active but activatable adhesive (32, 35) around the edges of each unit such that when the webs are folded or brought together to form a series of registering back and front sheets and the adhesive activated, each unit is completely sealed around its edges to provide a sealed mailer, the web or one of the webs being adapted to be fed through a non-impact printer and the individual units printed with individual information (such as an address) before the webs are folded or brought together, and in which the adhesive is so applied that for each mailer the adhesive (32) will be substantially continuous along a first edge (30, 31) with a line of perforations extending inside that first edge through the registering front and back sheets, and the adhesive (35) which seals the two opposite edges (33, 34) extending normal to said one edge (30, 31) is of a peel-apart type.

- A business form assembly for forming a plurality of mailers comprising:
 - a continuous web including a plurality of mailer forming units separable from one another by first transverse lines of perforations extending across said web;
 - each unit, after separation from said web, having a central fold line such that the unit can be folded over along said central fold line to form a malier having a front sheet and a back sheet in register with one another, edges of said front and back sheets in register with one another defining edge portions of the maller perpendicular and parallel to said fold line;

at least parts of an edge portion of the mailer parallel to the fold line carrying a first nonactive adhesive, such thet, when said edges-of said parallel edge portions are brought together, a first substantially continuous line of adhesive is provided for sealing said edge portions described.

a detachment line of perforations extending along said adep portions parallel to the fold line and haide said first adhesive line, parts of the edges of said front and back sheets forming edge portions of said maller normal to the fold line having non-active, non-continuous second lines of adhesive thereationg, such that when the unit is folded to bring said edge together second peel-apart lines of non-continuous adhesive are provided for sealing these edges together along their lengths in a manner enabling the edges thereof to be peeled apart.

- A business form assembly for forming a mailer comprising:
 - a message sheet suiteble for passage through a non-impact printer to receive information thereon:

a cover sheet of a corresponding size to said message sheet, each of said sheets having longitudinal and transverse edges, one of said cover sheets and said message sheets carrying adhesive along each of marginal edge portions adjacent said edges such that when said sheets are collated and the adhesive activated, the sheets will adhere to one another along their marginal edge portions to form a sealed maller;

the adhesive along a first of the edge portions of said one sheet being formed in a substantially continuous line, said one sheet being formed in a substantially continuous line of perforations parallel to the first edge portion and linwardly of said continuous line of adhesive, the other sheet being formed with a line of perforations adapted to substantially origister with the line of perforations of said one sheet when the sheets are collated; and

the adhesive along at least the two oppo-


site edge portions of said one sheet extending normal to said first edge portion being of a peelapart type.

- A business form assembly according to claim 3 in which said adhesive is a heat-activatable adhesive, said adhesive being applied to said cover sheet with no adhesive applied to said message sheet.
- 5. A business form assembly according any of claims 1 to 4 in which the peel-apart lines of adheristic comprise spaced-apart discrete areas of adhesive comprise spaced-apart discrete areas of adhesive, the spacing being such that the total area free of adhesive along each line of discrete non-continuous adhesive areas is at least twice the total area covered by such adhesive.
- A business form assembly according to claim 5 in which said area free of adhesive is in the range of 3 to 9 times as great as the area covered by adhesive.
- A business form assembly according to claim 7 in which said area free of adhesive is in the range of 4 to 5 times as great as the area covered by adhesive.
- A business form assembly according to claim 2 or any claim dependent thereon in which the adhesive is arranged substantially symmetrically of the units so that each half of the unit carries substantially half the adhesive.
- A business form assembly according to claim 2 or any claim dependent thereon in which the adhesive is a heat-activable achesive and the areas of peel-apart adhesive on one-half of each unit are interspaced between the areas of peel-apart adhesive on the other half of the unit when the unit is folded.
- 10. A business form assembly according to any of daims 1 to 9 in which the adhesive is pressure activatable and the areas of adhesive on each half of each unit corresponds with one another so that they will register in contact with one another when the back and front sheets are brought together.
- A sealed maller formed from an assembly according to any of the preceding claims.

55

7

FIG. 1











FIG. 4






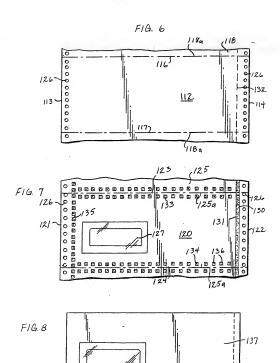









European Patent

EUROPEAN SEARCH REPORT

Application Number

EP 92 30 7087 'Page 1

	DOCUMENTS CONSIDERED TO BE	RELEVANT		
ategory	Citation of document with indication, where approp of relevant passages	riate,	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
	EP-A-0 365 192 (MOORE BUSINESS FO INC.) * figures 1-3 * * column 2, line 38 - column 3, l * column 3, line 14 - line 26 * * column 4. line 32 - line 45 *	·	,3-8,11	B42D5/02 B42D15/08
			2,9,10	
	EP-A-0 251 580 (MOORE BUSINESS FO * figures 1-3 * * column 11, line 39 - line 44 *	ORMS INC.)	1,3,4,8, 11	
	EP-A-0 217 674 (MOORE BUSINESS FO	DRMS, a	2	
	* the whole document *		1,3,4,8, 11	
	FR-A-2 252 792 (HERVÉ ET FILS - I DU SENTIER) * figure 2 *	PAPETERIES	9	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
	* page 3, line 5 - line 10 *		10,11	B42D B42C
, P	US-A-5 046 661 (Y. KIMURA) 10 September 1991 * the whole document *		10	
	AU-D-4 072 368 (2B SYSTEM CORPOR * figures 3,6,7 * * page 5, line 8 - line 13 *		1,3,5,6 11	
(US-A-4 148 430 (T.L. DRAKE)		2,5-7,1	1
4	* column 4, line 49 - line 56 *	-/	1	
	The present search report has been drawn up for all o			
		ABER 1992		HAEUSLER F.U.
A:t	articularly relevant if taken alone	T: theory or principl E: earlier patent doc after the filing da D: document cited is L: document cited for &: member of the sa document	attent, out pu ets in the applicati or other reason	nusaes oo, or



European Patent

EUROPEAN SEARCH REPORT

Application Number

EP 92 30 7087 Page 2

]	DOCUMENTS CONSI	DERED TO BE RELEV	ANT		
Category	Citation of document with in of relevant pas	dication, where appropriate,	Rel	evant laim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
(US-A-4 050 361 (J.E.	TRAISE)	1,2 11	,5,6,	
A,D	* figure 1 * EP-A-O 143 622 (MOOI INC.) * figure 1 * * page 5, line 2 -		1,3	,4,8,	
١	DE-A-2 163 376 (FELI PRODUKTIONSGESELLSC * figures 1,2 *	DMOHLE ANLAGEN- UND HAFT MBH)	1,2	,11	
A	EP-A-0 201 960 (SPE B.V.) * figure 1 * * column 3, line 1 * column 3, line 11 * column 4, line 10	- line 4 * - line 18 *	0 1,3	,5,11	
A	EP-A-0 058 248 (TRA * figures 1-3 * * page 3, line 7 - * page 4, line 2 -	line 14 *	1,3 8,1	,5,6, 1	TECHNICAL FIELDS SEARCHED (Int. CL.5)
A	GB-A-1 470 993 (E.L * figures 1-6 * * page 1, line 92 - * page 3, line 48 -	page 2. line 6 *	1,2 10,	1,8, 11	
	EP-A-0 403 136 (MOCINC.)	DIRE BUSINESS FORMS,			
The present search report has been drawn up for all claims					Tomas .
THE HAGUE			26 NOVEMBER 1992		HAEUSLER F.U.
THE HAGUE CATEGORY OF CITED DOCUMENTS X: particularly relevant if token abless Y: particularly relevant if contined with another A: technologies backgrown O: non-mitten disclosure D: incorrelated tocoment			T: there or principle underlying the invention Executive or principle underlying the invention Executive the filling date D: a focusion of tick in the application L: document diet in the application A: member of the same patient family, corresponding document		